

G. H. TAYLOR.

MEDICAL RUBBING APPARATUS.

No. 175,202.

Patented March 21, 1876.

Fig. 1.


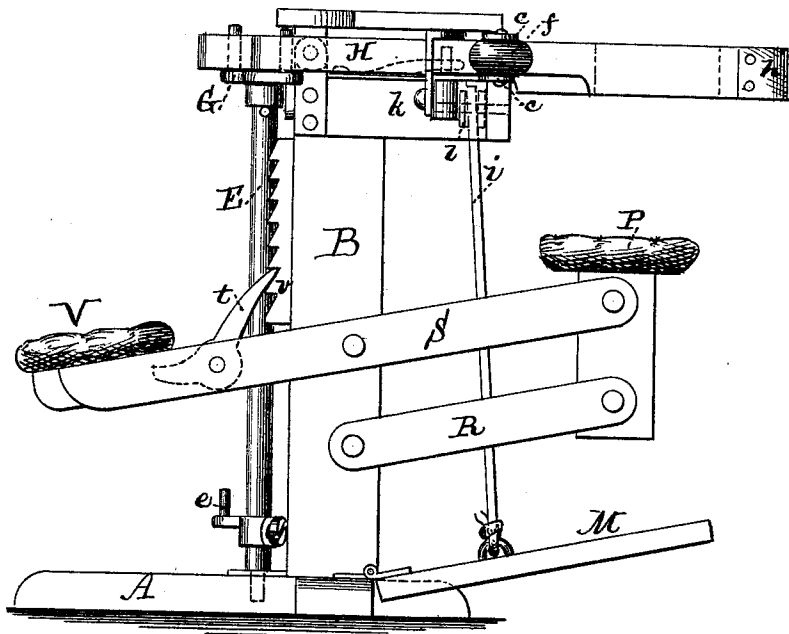


Fig. 2.

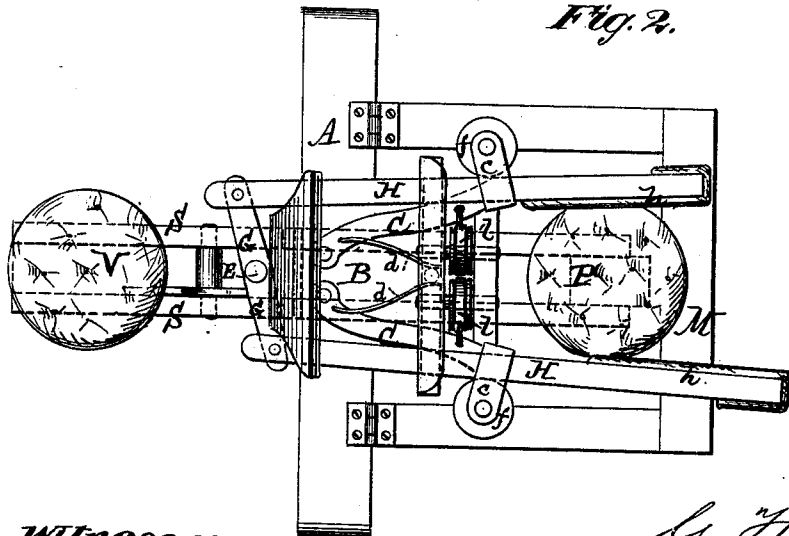

Witnesses  
John Becker  
Fred Hayner

G. H. Taylor  
by his Attorney  
Rowland Allen

# UNITED STATES PATENT OFFICE.

GEORGE H. TAYLOR, OF NEW YORK, N. Y.

## IMPROVEMENT IN MEDICAL RUBBING APPARATUS.

Specification forming part of Letters Patent No. **175,202**, dated March 21, 1876; application filed May 17, 1875.

*To all whom it may concern:*

Be it known that I, GEORGE H. TAYLOR, of New York, in the county and State of New York, have invented an Improved Medical Rubbing Apparatus; and I do hereby declare that the following is a full, clear, and exact description of the same, reference being had to the accompanying drawing, forming part of this specification.

The object of my invention is to produce effects on different parts of the human body similar to those produced by rubbing with the hands, and to afford facility to the patient for directing and controlling the rubbing operation; and it consists in a novel combination of reciprocating rubbers, an adjustable seat, a treadle or lever, and connecting devices, whereby the pressure of the rubbers may be controlled at the pleasure of the patient.

In the accompanying drawing, Figure 1 is a side view of my improved apparatus. Fig. 2 is a top view of the same.

A represents a base or platform, in which rests the lower end of a standard, B, at the upper end of which is pivoted the inner ends of two arms, C C, which are provided with springs *d d* having a tendency to keep them pressed outward from each other. The outer end of each of the arms C terminates in two lugs, *c c*, between which is journaled a friction-roller, *f*.

On the rear side of the standard B is a vertical shaft, E, the ends of which work in suitable bearings provided for the purpose. At the upper end of this shaft is attached, midway of its length, a horizontal arm, G, to the ends of which are pivoted the rear ends of the rubbers, which consist of strips or bars H, the inner sides of which, near the front ends, are covered with rubber, leather, fibrous fabric, or other suitable material, *h*, attached in any suitable manner. The rear portions of the bars H pass between the lugs *c* and the rollers *f*, the rollers bearing on the outer sides of the bars.

Near the outer ends of the arm C are attached the upper ends of two straps, cords, or bands *i*, which pass over pulleys *l*, journaled in a frame, *k*, attached to the upper end of the standard B, and have their lower ends at-

tached to a treadle or lever, M, the rear end of which is hinged or pivoted to the base or platform A.

The vertical shaft E is provided with a projecting arm or crank, *e*, to which power may be applied in any suitable manner to rock the shaft E and oscillate the arm G, so as to give a reciprocating motion to the rubbers H.

The seat P for the patient is attached by pivots to the front ends of two arms, R R, the rear ends of which are pivoted to the standard. Said seat is also pivoted to the front ends of two levers, S S, which have their fulcra on the standard B, by which means the seat is adjusted to different heights, and always remains in a horizontal position, the arms R and lever S being parallel with each other.

The rear ends of the levers are united, so as to operate as one lever, and may be provided with a seat, V, for the attendant. The seat P is held in place, at different heights, by means of a pawl, *t*, on the lever S, and a ratchet, *v*, on the standard B, engaging with each other, as shown in Fig. 1.

The patient sits on the seat P when at its lowest position, and by means of the feet on the treadle or lever M regulates the pressure of the rubbers H H, which are then set in motion by the attendant by any suitable means. The upper part of the body is rubbed first, and then the seat is gradually raised, either by the feet of the patient pressing against the floor, or by the attendant pressing down the rear end of the lever S, by which means the lower parts of the body are brought in contact with the rubbers.

I do not claim, in this application, the rising and falling seat, or the reciprocating rubbers, either separately or in combination.

What I claim as new herein, and desire to secure by Letters Patent, is—

The combination, with the seat P and rubbers H H, of the treadle or lever M, straps or bands *i i*, and arms C C, substantially as and for the purpose herein described.

GEO. H. TAYLOR.

Witnesses:

BENJAMIN W. HOFFMAN,  
F. HAYNES.

(No Model.)

G. H. TAYLOR.  
MOVEMENT CURE.

No. 263,625.

Patented Aug. 29, 1882.


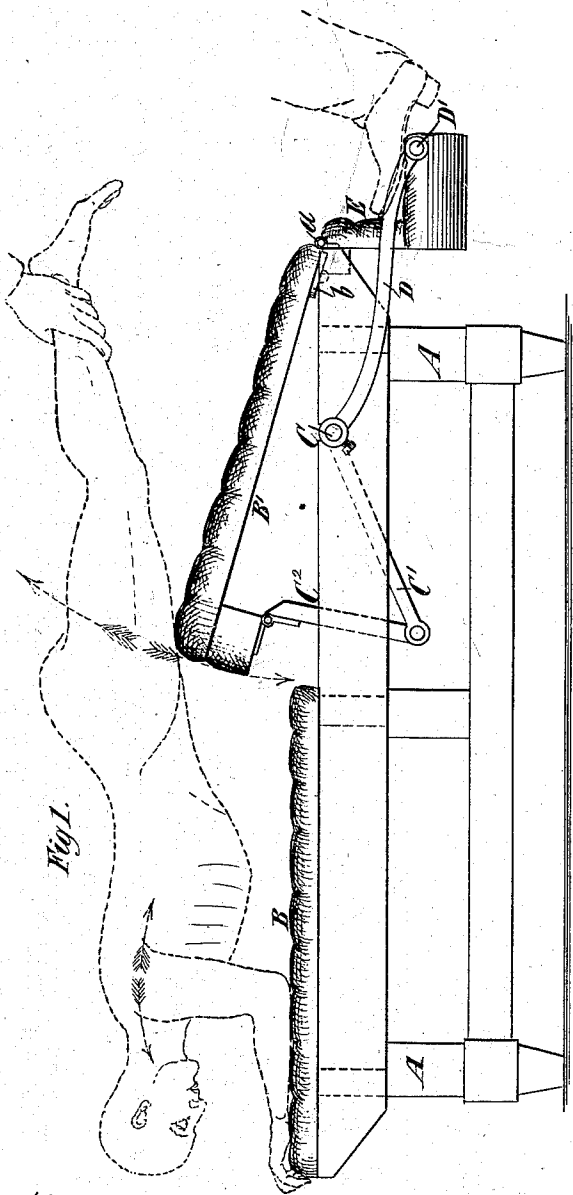


Fig. 2.

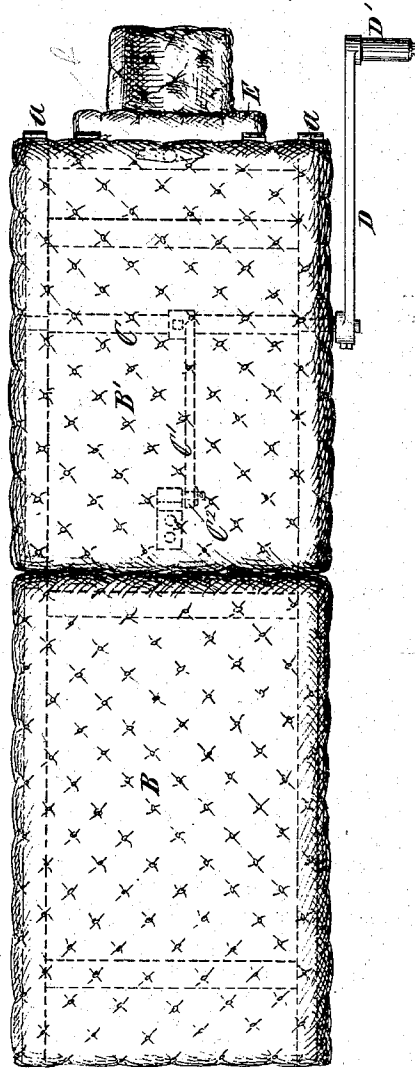

Witnesses

Geo. Haynes  
Ed. L. Moran

Inventor

George H. Taylor  
By Geo. Haynes  
Brown & Brown

# UNITED STATES PATENT OFFICE.

GEORGE H. TAYLOR, OF NEW YORK, N. Y.

## MOVEMENT CURE.

SPECIFICATION forming part of Letters Patent No. 263,625, dated August 29, 1882.

Application filed June 19, 1882. (No model.)

*To all whom it may concern:*

Be it known that I, GEORGE H. TAYLOR, M. D., of the city of New York, in the county and State of New York, have invented a certain new and Improved Apparatus for Removing from the Pelvis the Weight of the Abdominal Contents, of which the following is a specification.

The object of my invention is to remove from the lower part of the pelvic cavity of the body the pressure due to the weight of the superposed viscera by changing the position of the body, so that the effect of gravitation will cause the abdominal and pelvic contents to move forward into the upper part of the abdominal cavity, whereby the pelvis is relieved of the constant pressure upon it and the evil consequences of such continued pressure are removed.

My invention consists essentially in the combination, in a couch, of a top surface comprising a fixed portion, upon which the patient may lie face downward, with the weight of the upper part of the body resting upon the elbows, and a movable portion, which serves as a support for the thighs, and devices for imparting to said movable portion a rising and falling motion. The movable portion, in rising, raises the hips, so that the part of the body above the hips will incline downward, and thus cause the abdominal contents and the organs pressing upon the pelvis to move or gravitate toward the head and into the upper and larger part of the abdominal cavity, thereby relieving the pelvis of the superposed weight and restoring the physico-mechanical supports of the pelvic contents and a natural and healthful circulation. The rising and falling thigh-support may be formed by hinging the after part of the couch at the back end, so that the front end of said after part may swing up and down. After the patient has been treated as above described he may lie upon the back, with the upper part of the body resting upon the hinged part of the couch; and I also combine with said hinged part a movable head-rest, which may be secured in proper position to support the head when the person lies upon the back.

In the accompanying drawings, Figure 1 represents a sectional elevation of my improved apparatus, and Fig. 2 represents a plan thereof.

Similar letters of reference designate corresponding parts in both the figures.

A designates the supporting frame-work of the couch, which may be of any suitable construction, and upon this frame-work is supported the top or resting surface, B B', which is of suitable length to accommodate a person in a recumbent position. The part B, which extends for rather more than half the length of the couch, is fixed rigidly to the frame A, and is covered or upholstered in any desirable manner. The remaining part, B', is hinged at its rear end to the rear end of the frame-work A by hinges *a* or otherwise, and its front end has a rising and falling motion on the hinges *a* as a center. When let down the part B' rests upon the frame A and forms a continuation of the fixed part B, and the hinges *a* enable it to be raised to any angle desired.

C designates a rock-shaft, which is journaled in the frame A and has a forwardly-extending arm, C', connected by a link, C<sup>2</sup>, with the free end of the part B' of the top. Upon the rock-shaft C is secured a second arm, D, which extends rearward and is furnished with a treadle, D', on which the foot of the operator may bear, as shown in dotted outline in Fig. 1.

In using my apparatus the patient lies upon the couch face downward, with the weight of the upper part of the body resting upon the elbows and supported on the fixed part B of the top. The operator then seizes the limbs of the patient, who may be covered with a blanket or ordinary dress, and at the same instant presses down on the treadle D'. This causes the hinged part B' to rise, and, acting upon the thighs, to raise the body into the position shown in dotted lines in Fig. 1, and the body may be thus raised more or less, as may be desired. This causes the axis of the trunk to leave a horizontal position and to incline downward from the thighs toward the head. The thigh-support B' is then allowed to fall, and again raised and lowered, and the degree of elevation and the rapidity of movement may be determined by the condition of the patient and the judgment of the operator. As the thighs are lifted they are also made to recede, and the whole body with them, except the points of bearing of the elbows on the fixed top B of the couch; and as this is an impor-

tant part of the treatment the operator should see that neither the relation of the elbows to the fixed part B nor the thighs to the part B' is changed during the rising and falling motion of the body.

5 My apparatus may also be used in another way, if desired.

E designates a head-rest hinged at the end of the part B', and which is adapted to be swung up into line therewith and secured by a button, b, or other means. When this is done the patient may lie on his back, with the head on the head-rest and the hands clasped over the head, while the legs are drawn up so that the feet rest on the fixed portion B and the trunk rests on the hinged part B'. The operator now presses on the treadle, and the part B' raises the trunk upward at an angle, while the feet rest firmly on the part B. While the pelvis is the highest and the diaphragm lowest the operator presses upon the abdomen, beginning at the pelvis, and continuing the pressure by a gentle stroke toward the diaphragm. As before, the contents of the whole cavity of the trunk are caused to gravitate toward the diaphragm instead of the pelvis. This effect is greatly increased, to the extent of moving

the contents of the pelvis, by the action of the hand of the operator.

What I claim as my invention, and desire to secure by Letters Patent, is—

1. In a couch, the combination of a top or resting surface, comprising a fixed portion, upon which the patient may lie face downward, with the weight of the upper part of the body resting upon the elbows, and a movable portion, which serves as a support for the thighs, and devices for imparting a reciprocating rising and falling motion to said thigh-support, substantially as and for the purpose described.

2. The combination of the frame A, the fixed portion B, the hinged top portion, B', the rock-shaft C, and arm C' and link C<sup>2</sup>, and the arm D, substantially as described.

3. In a couch, the combination of the fixed portion B, the hinged portion B', the head-rest E, hinged to the portion B', and devices for giving the portion B' a rising and falling motion, substantially as described.

GEO. H. TAYLOR, M. D.

Witnesses:

FREDK. HAYNES,  
ED. L. MORAN.